

Speed controllers type MTY

Electronic manual speed controller

Application

- Manual speed control for speed controllable motors
- Suitable for built-in as well as for surface mounting (MTY 4 only for surface mounting)

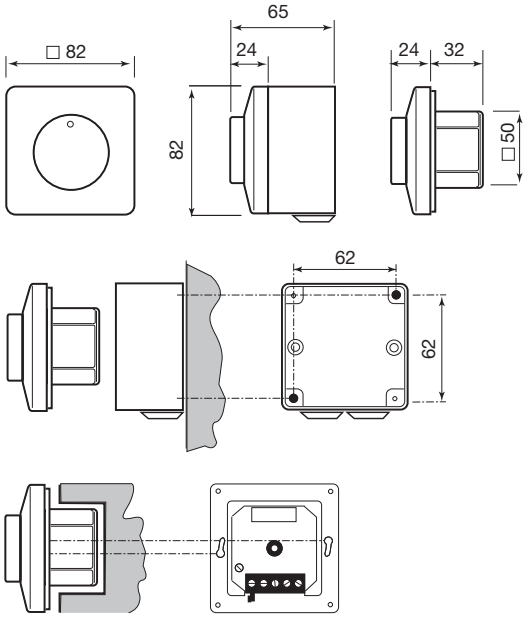
Composition


- Plastic enclosure, ABS, RAL 9001
- Supply: 230 Vac - 50 Hz
- Infinitely variable control
- Fuse (A) (5*20 mm), spare fuse included
- Built-in temperature cut-off fuse
- Control: **MTY** from minimum to maximum speed
- Minimum speed setting by trimmer
- IP: 44 (built-in mounting) / 54 (surface mounting)
- Max ambient temperature: 35°C
- CE-Certificate: The EMC directives: 89/336/CEE with modification 92/31/CEE.
- The low voltage directive: 73/23/CEE
- Several motors can be connected as long as the current limit is no exceeded
- All models have an extra (not regulated) 230V output
- Can generate a magnetic noise at low fan speed

Order example

MTY2

MTY = type
2 = max current


65
□ 82
24
24
32
82
□ 50
62
62


2
N
N
4
3
M
L
1
N