



T-pieces with rubber type TDG90

- Galvanized steel symmetrical T-pieces 90°, with rubber sealing.
- Connection pieces until Ø1250 with airtightness class D to EN 12237

Order example


- **TDG90, 250/160**

Explanation :

TDG90 = Type of T

250 = Diameter of d1

160 = Diameter of d3

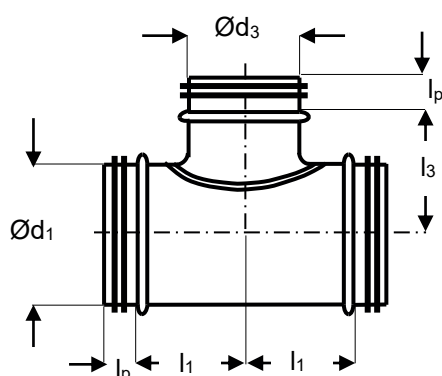

Spiral duct and fittings

TDG90	Dimensions					kg
	Ød1	Ød3	l1	l3	lp	
080	080	080	55	55	≤25	0.2
100	100	080	55	65	≤25	0.3
		100	65	65	≤25	0.4
125	125	080	55	77.5	≤25	0.5
		100	65	77.5	≤25	0.5
		125	82.5	82.5	≤25	0.6
140	140	80	55	85	≤25	0.7
		100	65	85	≤25	0.5
		125	82.5	90	≤25	0.6
		140	90	90	≤25	0.7
150	150	80	55	90	≤25	0.5
		100	65	90	≤25	0.7
		125	82.5	95	≤25	0.8
		140	90	95	≤25	0.8
		150	95	95	≤25	0.9
160	160	080	55	95	≤25	0.6
		100	65	95	≤25	0.7
		125	82.5	100	≤25	0.8
		140	90	100	≤25	0.8
		150	95	100	≤25	0.9
		160	105	105	≤25	0.9
180	180	080	55	105	≤25	0.6
		100	65	105	≤25	0.8
		125	82.5	110	≤25	0.9
		140	90	110	≤25	0.9
		150	95	110	≤25	0.9
		160	105	115	≤25	1.2
		180	115	115	≤25	1.3
200	200	080	55	115	≤25	0.8
		100	65	115	≤25	1
		125	82.5	120	≤25	1
		140	90	120	≤25	1
		150	95	120	≤25	1
		160	105	125	≤25	1.2
		180	115	125	≤25	1.3
		200	125	125	≤25	1.3
224	224	100	65	127	≤25	1.1
		125	82.5	132	≤25	1.1
		140	90	132	≤25	1.1
		150	95	132	≤25	1.2
		160	105	137	≤25	1.2
		180	115	137	≤25	1.4
		225	137	137	≤25	1.7
250	250	100	65	140	≤25	1.2
		125	82.5	145	≤25	1.3
		140	90	145	≤25	1.4
		150	95	145	≤25	1.4
		160	105	150	≤25	1.5
		180	115	150	≤25	1.7
		200	125	150	≤25	1.7
		224	137	150	≤25	2
		250	150	150	≤25	2.2
280	280	100	65	155	≤25	1.7
		125	82.5	160	≤25	1.8
		140	90	160	≤25	2
		150	95	160	≤25	2
		160	105	165	≤25	2.2
		180	115	165	≤25	2.3
		200	125	165	≤25	2.4
		224	137	165	≤25	2.4
		250	150	165	≤25	3
		280	165	165	≤25	3.5
300	300	100	65	165	≤25	1.7
		125	82.5	170	≤25	1.8
		140	90	170	≤25	1.9
		150	95	170	≤25	2
		160	105	175	≤25	2
		180	115	175	≤25	2.3
		200	125	175	≤25	2.3
		224	137	175	≤25	2.5
		250	150	175	≤25	2.7
		280	165	175	≤25	3
		300	175	175	≤25	3.2
315	315	100	65	172.5	≤25	1.7
		125	82.5	177.5	≤25	1.8
		140	90	177.5	≤25	2
		150	95	177.5	≤25	2.0
		160	105	182.5	≤25	2.0
		180	115	182.5	≤25	2.3
		200	125	182.5	≤25	2.4
		224	137	182.5	≤25	2.6
		250	150	182.5	≤25	2.9
		315	182.5	182.5	≤25	3.4
355	355	100	65	192.5	≤50	1.9
		125	82.5	197.5	≤50	2.0
		160	105	202.5	≤50	2.2
		200	125	202.5	≤50	2.6
		224	137	202.5	≤50	2.8
		250	150	202.5	≤50	3.0
		315	182.5	202.5	≤50	3.5
		355	202.5	202.5	≤50	4.1
400	400	100	65	215	≤50	2.4
		125	82.5	220	≤50	2.5
		160	105	225	≤50	2.8
		200	125	225	≤50	3.1
		224	137	225	≤50	3.3
		250	150	225	≤50	3.6
		300	175	225	≤50	3.8
		315	182.5	225	≤50	4.1
		355	202.5	225	≤50	4.8
		400	225	225	≤50	5.4
450	450	125	82.5	245	≤50	3.3

Spiral duct and fittings

TDG90	Ød1	Dimensions				kg
		Ød3	l1	l3	lp	
		160	105	250	≤50	3.7
		200	125	250	≤50	3.9
		250	150	250	≤50	4.4
		315	182.5	250	≤50	4.9
		355	202.5	250	≤50	5.5
		400	225	250	≤50	6.0
		450	250	250	≤50	9.3
	500	125	82.5	270	≤50	3.5
		160	105	275	≤50	3.9
		200	125	275	≤50	4.4
		250	150	275	≤50	5.0
		315	182.5	275	≤50	5.8
		355	202.5	275	≤50	6.2
		400	225	275	≤50	6.8
		450	250	275	≤50	10.3
		500	275	275	≤50	11.1
	560	125	82.5	270	≤50	3.5
		160	105	275	≤50	3.9
		200	125	275	≤50	4.4
		250	150	275	≤50	5.0
		315	182.5	275	≤50	5.8
		355	202.5	275	≤50	6.2
		400	225	275	≤50	6.8
		450	250	275	≤50	10.3
		500	275	275	≤50	11.1
	600	200	125	325	≤50	5
		250	150	325	≤50	5.7
		315	182.5	325	≤50	3.7
		400	225	325	≤50	8.2
		450	250	325	≤50	13.4
		500	275	345	≤50	14.5
		560	305	325	≤50	15.4
		600	325	325	≤50	16
	630	200	125	345	≤50	5.2
		250	150	345	≤50	6.4
		315	182.5	345	≤50	7.4
		400	225	345	≤50	10.5
		450	250	345	≤50	12.0
		500	275	345	≤50	14.4
		560	305	345	≤50	17.3
		630	345	345	≤50	18.6
	710	500	275	385	≤50	18.8
		560	305	385	≤50	20.1
		600	325	385	≤50	20.9
		630	345	385	≤50	21.6
		710	385	385	≤50	23.6
		800	430	430	≤50	26.5
	800	560	305	430	≤50	22.6
		600	325	430	≤50	23.5
		630	345	430	≤50	24.3
		710	385	430	≤50	26.5
		800	430	430	≤50	28.0
		900	480	480	≤50	31
	900	630	345	480	≤50	33.8
		710	385	480	≤50	36.5
		800	430	480	≤50	39.4
		900	480	480	≤50	39.4
		1000	530	530	≤50	37.5
		1120	590	590	≤50	40.6
	1000	800	430	530	≤50	43.8
		900	480	530	≤50	46.9
		1000	530	530	≤50	52.6
		1120	590	590	≤50	56.8
		1250	655	655	≤50	60.9
		1250	655	655	≤50	66.2
	1120	900	480	590	≤50	63.5
		1000	530	590	≤50	68.1
		1120	590	590	≤50	74.1
		1250	655	655	≤50	79.8
		1250	655	655	≤50	79.8